


Dust-proof/Splash-proof
RoboCylinder Slider Type

RCP4W Series

**ROBO
CYLINDER**

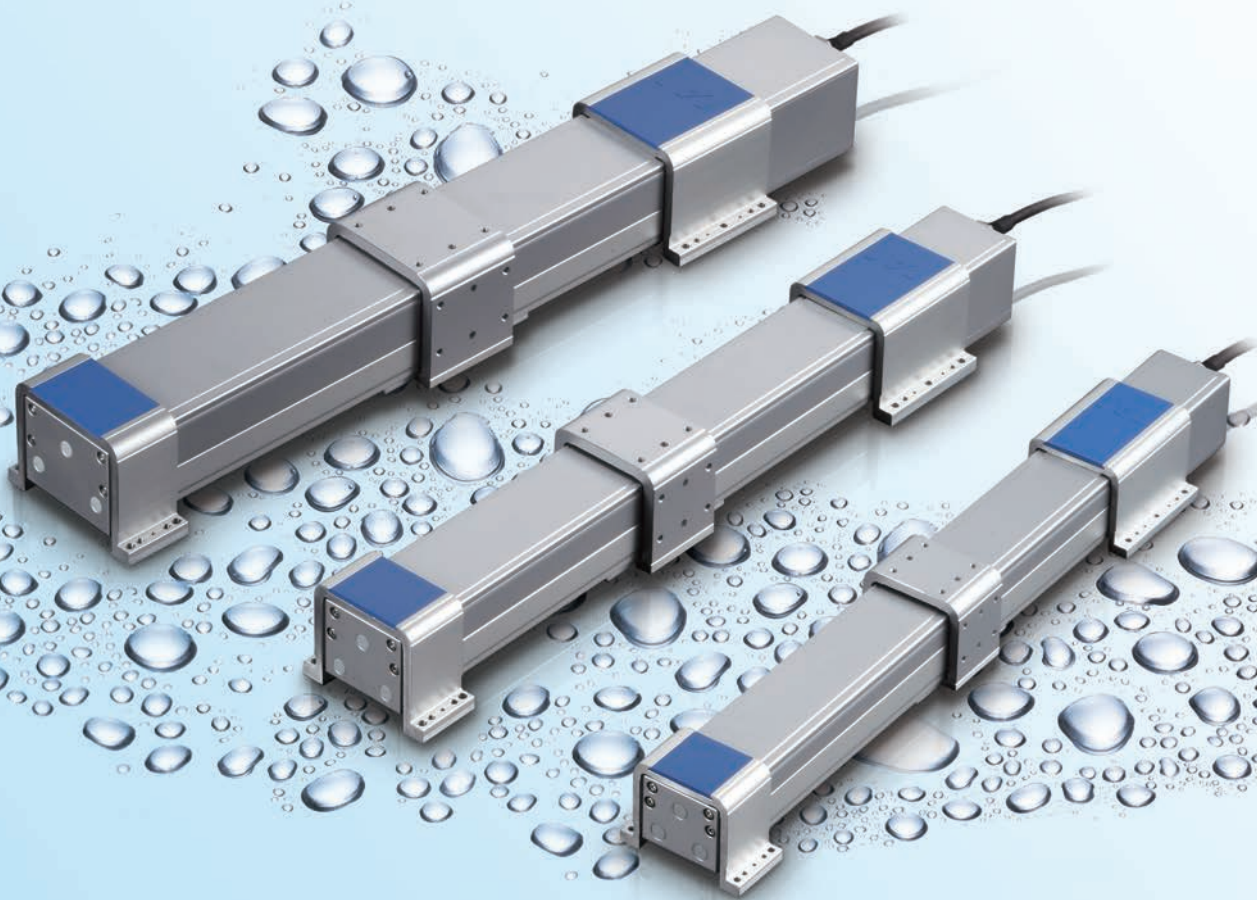

A First for Slider-type RoboCylinders!

Dust-proof/Splash-proof Performance of IP65, Plus At-will Installation Configuration Flexibility

Features

1 Dust-proof/Splash-proof Performance of IP65

A special structure where the base is positioned upside down to position the opening at the bottom which achieves high dust-proof/splash-proof performance of IP65 for the first time with slider-type RoboCylinders.










IP Marking

IP

- First digit**
Protection against the human body and solid objects
- Second digit**
Protection against the intrusion of water



IP Classes

IP class		Description	Applicable IAI products
IP67	Solid objects	Fully protected against the entry of powder dust into the equipment.	 Slider type RCP2W-SA16C
	Water	Even when the equipment is submerged in water, water does not enter the equipment.	
IP65	Solid objects	Fully protected against the entry of powder dust into the equipment.	 Slider type RCP4W  Slider type ISWA/ISPWA  Pulse motor rod type RCP2W-RA4C/RA6C  SCARA robot IX-NNW
	Water	The equipment receives no harmful effect even when directly hit by water jets from any direction.	
IP54	Solid objects	Fully protected against the entry of powder dust into the equipment.	 High-thrust rod type RCP2W-RA10C  24-V servo motor rod type RCAW-RA3/RA4  230-V servo motor rod type RCS2W-RA4
	Water	The equipment receives no harmful effect even when contacted by water splashes from any direction.	
IP50	Solid objects	Fully protected against the entry of powder dust into the equipment.	 Small gripper (dust-proof type) RCP2W-GR
	Water	The equipment is not protected against water.	



2

Compact


IAI's splash-proof single-axis robots (ISWA series) have been made smaller to approx. 60% in cross-section area ratio while keeping the excellent splash-proof performance of ISWA robots. (60% is based on comparison of ISWA-S and RCP4W-SA5C)

	ISWA			RCP4W		
	Type L	Type M	Type S	SA7C	SA6C	SA5C
	(Actuator width)	(Actuator width)	(Actuator width)	(Actuator width)	(Actuator width)	(Actuator width)
Stroke (mm)	100 to 1200 (Available in 50 increments)	100 to 1000 (Available in 50 increments)	100 to 600 (Available in 50 increments)	100 to 700 (Available in 50 increments)	100 to 600 (Available in 50 increments)	100 to 500 (Available in 50 increments)
Maximum speed (mm/s)	1000	1000	800	530	400	330

3

Mount on the Wall or Hang from the Ceiling


Wall-mounting brackets and ceiling-mounting brackets are available as options, which significantly increase the freedom of installation.

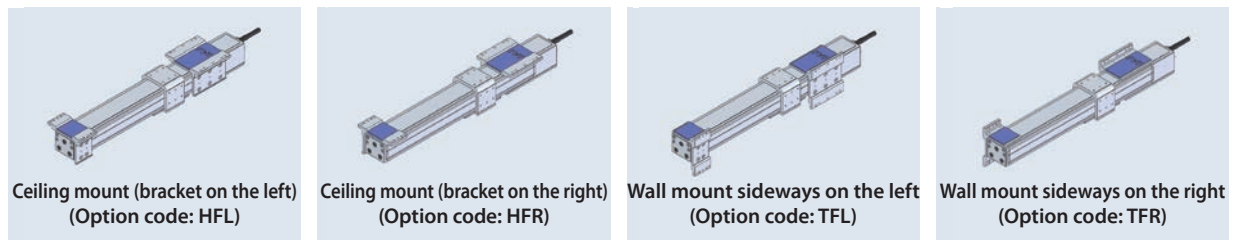

4

Installable on All Four Sides of the Top, Bottom, Left and Right of the Table


The table, positioned in a manner wrapping around the actuator, has tapped holes on all four sides of the top, bottom, left and right to increase the freedom of actuator installation.

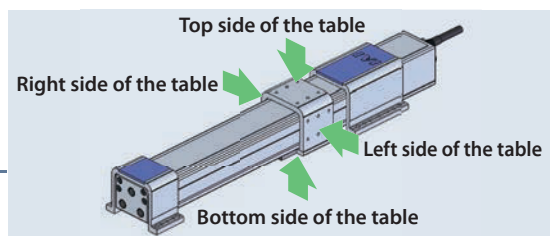

5


Choice of Grease

You can select either industrial grease (Daphne Eponex No. 2) (standard) or food grade grease (Medallion FM No. 1) for the guides and ball screw in the actuator.

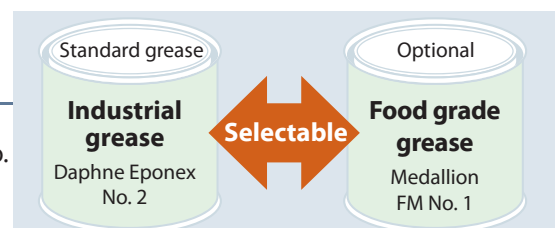

Specification List

Take note that, with the RCP4W series, the horizontal payload, the dynamic allowable moments, the overhang load length and the maximum stroke vary depending on whether the actuator is operated with its brackets on both ends fixed (both ends fixed) or with only the motor-side mounting bracket fixed in a cantilever configuration (cantilever).

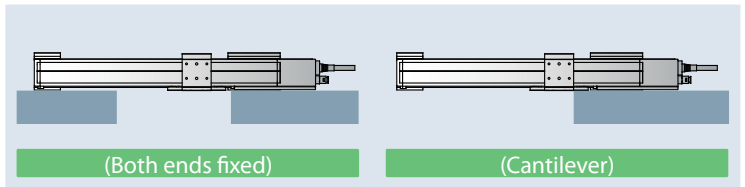


Base Specifications (Both Ends Fixed)

Series	Type	Actuator width (mm)	Motor type	Ball screw lead (mm)	Maximum speed (mm/s)	Acceleration (G)		Horizontal payload (kg)		Positioning repeatability (mm)	Dynamic allowable moment (N·m)			Overhang load length (mm)	Stroke (mm)	Page
						Rated	Maximum	Rated acceleration	Maximum acceleration		Ma	Mb	Mc			
RCP4W	SA5C	55	35 □	10	330	0.3	0.6	5	2	±0.02	3.4	4.9	8	125	100 to 500 (Available in 50-mm increments)	P5
				5	165			10	4							
	SA6C	62	42 □	12	400			7.5	3		4.7	6.7	11	150	100 to 600 (Available in 50-mm increments)	P7
				6	200			15	6							
	SA7C	77	56 □	16	530			10	4		6.1	8.8	16.8	175	100 to 700 (Available in 50-mm increments)	P9
				8	265			20	8							

Cantilever

Series	Type	Actuator width (mm)	Motor type	Ball screw lead (mm)	Maximum speed (mm/s)	Acceleration (G)		Horizontal payload (kg)		Positioning repeatability (mm)	Dynamic allowable moment (N·m)			Overhang load length (mm)	Stroke (mm)	Page
						Rated	Maximum	Rated acceleration	Maximum acceleration		Ma	Mb	Mc			
RCP4W	SA5C	55	35 □	10	330	0.3	0.6	1.5	0.5	±0.02	1.7	2.5	4	75	150 max.	P5
				5	165			2	1							
	SA6C	62	42 □	12	400			3	1.5		2.4	3.4	5.5	90	150 max.	P7
				6	200			4.5	2.5							
	SA7C	77	56 □	16	530			4.5	3		3.1	4.4	8.4	105	150 max.	P9
				8	265			7	4							

System Configuration * For details on each device, refer to the RCP4 catalog.

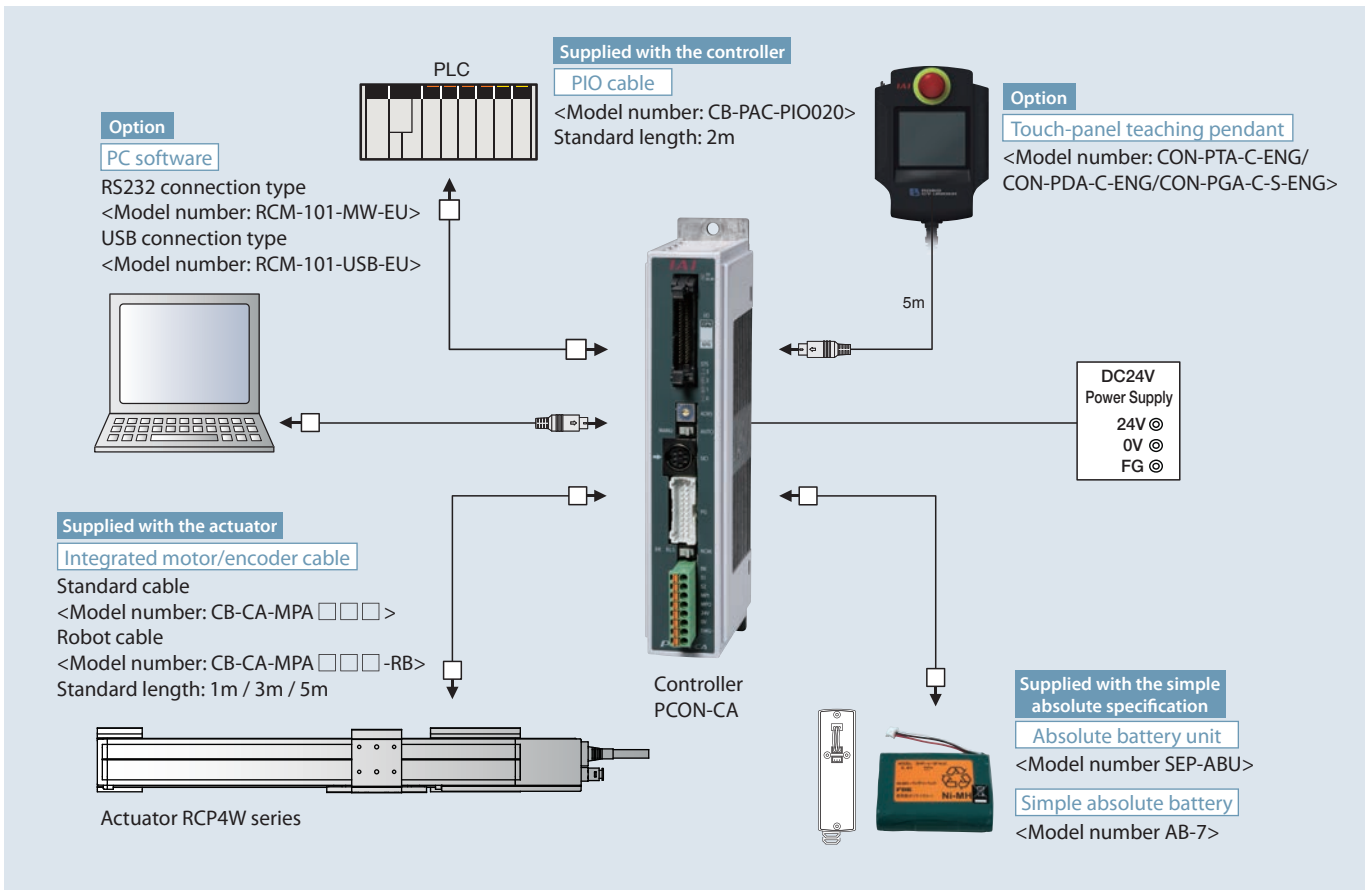

Model number

Actuator

RCP4W — — | — — — — **P3** — —

Series Type code Encoder type Motor type Ball screw lead Stroke (mm) Applicable controller Cable length Options


SA5C	Actuator width 55 mm	I	Incremental	5	Lead 5	P3	PCON-CA	A1	Cable exit from the left
SA6C	Actuator width 62 mm	35P	35 □ motor	6	Lead 6	N	No cable	A3	Cable exit from the right
SA7C	Actuator width 77 mm	42P	42 □ motor	8	Lead 8	P	1 m	AL	Additional alumite coating
		56P	56 □ motor	10	Lead 10	S	3 m	GE	Food grade grease (edible grease)
				12	Lead 12	M	5 m	NM	Non-motor side specification
				16	Lead 16	X □	Length designation	HFL	Ceiling mount (left)
				100	100mm	R □ □	Robot cable	HFR	Ceiling mount (right)
				?	?			TFL	Wall mount sideways on the left
				700	700mm			TFR	Wall mount sideways on the right

(Can be set in 50-mm increments.)

Actuator Options


Optional Cable Exit Direction Code: **A1, A3**

You can select one of the following three cable exit directions. If no direction is specified, the cable is exited from the rear.




Exit from the rear (standard)

Option code: **(Blank)**



Exit from the left side face

Option code: **A1**



Exit from the right side face

Option code: **A3**

Additional Alumite Coating Code: **AL**

The actuator is coated with alumite, but alumite has been removed in the machined areas of the table and front/rear mounting brackets. This option adds alumite coating to these areas. (This option is recommended if the actuator will come in contact with water.)

Food Grade Grease (Edible Grease) Code: **GE**

Normally industrial grease is applied to the guides and ball screw of the actuator. You can change this grease to food grade grease (edible grease).

Non-motor side Specification Code: **NM**

You can change the normal slider position of the actuator (motor side) to the non-motor side.

Actuator Mounting Bracket Code: **HFL, HFR, TFL, TFR** * Right and left of the wall mount represent the directions as viewed from the motor side.

You can change the bracket for securing the actuator so that the actuator can be installed directly on the ceiling or wall surface (left or right). Refer to P. 11 and 12 for detailed drawings.




Horizontal mount (standard)

Option code: **(Blank)**




Ceiling mount (bracket installed on the left)

Option code: **HFL**




Ceiling mount (bracket installed on the right)

Option code: **HFR**



Wall mount sideways on the left

Option code: **TFL**



Wall mount sideways on the right

Option code: **TFR**

Handling Precautions

1. This actuator cannot be used in applications where it comes in direct contact with food which will be sold.
2. Keep the acceleration/deceleration at or below the maximum value. If the actuator is operated beyond the maximum acceleration/deceleration (0.6 G), abnormal noise/vibration, failure or shorter life may result.
3. Keep the allowable load moments and overhang load length within the allowable values. If the actuator is operated beyond the allowable values, abnormal noise/vibration, failure or shorter life may result.
4. The actuator must be installed horizontally. It can be hung from the ceiling or mounted on the wall only when a dedicated bracket is used.
5. If the actuator is used in an environment subject to powder dust or water splashes, supply air from the air supply port provided on the rear of the actuator (air purge). For the amount of air to be supplied, etc., refer to the page of the specific model.
6. Consult IAI on a special environment (such as when a chemical coolant other than water is used).

RCP4W-SA5C

RoboCylinder
Pulse motor

Splash-proof slider type
Coupling specification

Actuator width: 55 mm

Model Specification Items

RCP4W — **SA5C** — **I** — **35P** — — — **P3** — —

Series — Type — Encoder type — Motor type — Lead — Stroke — Applicable controller — Cable length — Options

I: Incremental specification
* Also select code "I" for the simple absolute specification.

35P: Pulse motor size 35


10: 10mm
5: 5mm

100: 100mm
500: 500mm
(Can be set in 50-mm increments.)

P3: PCON-CA
* The RCP4W can be operated only with the PCON-CA

N: None
P: 1 m
S: 3 m
M: 5 m
X : Length designation
R : Robot cable



Refer to the option list below.

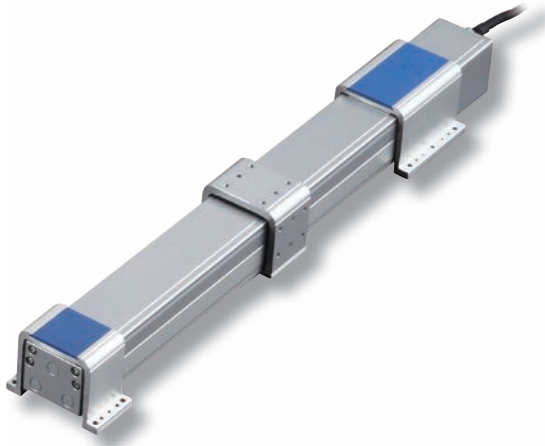

- (1) This actuator is designed exclusively for horizontal installation. It cannot be installed vertically. When hanging the actuator from the ceiling or mounting it on the wall, be sure to do so using an optional dedicated bracket.
- (2) The payload varies depending on the acceleration/deceleration. The upper limit of acceleration/deceleration is 0.6 G.
- (3) The cable joint connector is not splash-proof, so install the connector in a location where it will not come in contact with water.
- (4) Refer to the page at right for the air tube length and air flow rate when implementing air purge.

■ Payload by Acceleration/Deceleration

With the RCP4W series, the payload remains the same even when the speed is raised. However, the payload will drop if the acceleration is raised. Check on the table below.

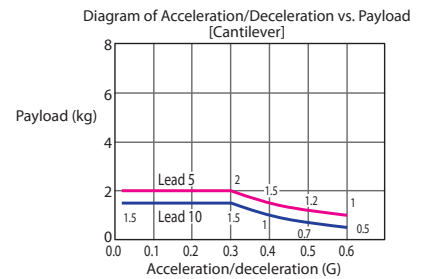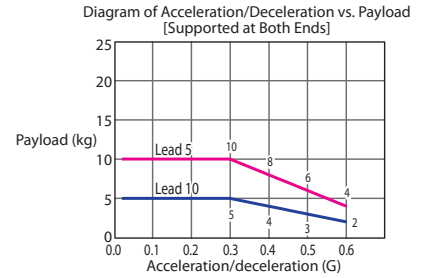

Actuator Specifications

■ Leads and Payloads

Model number	Lead (mm)	Maximum horizontal payload (kg)		Maximum push force (N)	Positioning repeatability (mm)	Stroke (mm)
		Supported on both ends	Cantilever			
RCP4W-SA5C-I-35P-10-①-P3-②-③	10	5	1.5	66.9	±0.02	100 to 500 (in 50-mm increments)
RCP4W-SA5C-I-35P-5-①-P3-②-③	5	10	2	147.9	±0.02	100 to 500 (in 50-mm increments)

Legend ① Stroke ② Cable length ③ Options

■ Stroke and Maximum Speed

Lead	Stroke	100 to 500 (in 50-mm increments)
		10
5		165

(unit: mm/s)

Cable length

Type	Cable symbol
Standard type	P(1m)
	S(3m)
	M(5m)
Special length	X06(6m) ~ X10(10m)
	X11(11m) ~ X15(15m)
	X16(16m) ~ X20(20m)
Robot cable	R01(1m) ~ R03(3m)
	R04(4m) ~ R05(5m)
	R06(6m) ~ R10(10m)
	R11(11m) ~ R15(15m)
	R16(16m) ~ R20(20m)


Options

Name	Option code	See page
Cable exit from the left side face	A1	→P4
Cable exit from the right side face	A3	→P4
Additional alumite coating	AL	→P4
Food grade grease (edible grease)	GE	→P4
Non-motor side specification	NM	→P4
Ceiling mount (bracket mounted on the left)	HFL	→P4
Ceiling mount (bracket mounted on the right)	HFR	→P4
Wall mount sideways on the left	TFL	→P4
Wall mount sideways on the right	TFR	→P4

Actuator Specifications

Item	Description
Drive system	Ball screw φ8 mm, rolled C10
Positioning repeatability	±0.02mm
Lost motion	0.1 mm or less
Static allowable moment	Supported on both ends
	Cantilever
Dynamic allowable moment (*)	Supported on both ends
	Cantilever
Overhang load length	Supported on both ends
	Cantilever
Protective structure	IP65 (with air purge)
Ambient operating temperature, humidity	0 to 40°C, 85% RH or less (Non-condensing)

(*) Based on 5000 km of traveling life

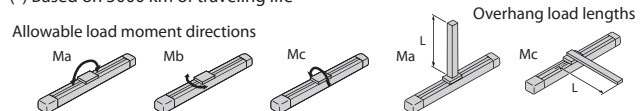

Dimensional Drawings

CAD drawings can be downloaded from the website.

www.robocylinder.de

2D CAD

* See P11 for the dimensional drawing for the ceiling mount specification. See P12 for the dimensional drawing for the wall mount specification.

*1 Connect the motor and encoder cables.


*2 During home return, be careful to avoid interference from peripheral objects because the slider travels until the mechanical end.

*3 Reference position for calculating moments.


Materials of Main Components

① Base	Extruded aluminum (A6063)	Surface treatment: Alumite coating
② Table	Extruded aluminum (A6063)	Surface treatment: Alumite coating (excluding machined areas)
③ Mounting bracket (front/rear)	Extruded aluminum (A6063)	Surface treatment: Alumite coating (excluding machined areas)
④ Side cover	Extruded aluminum (A6063)	Surface treatment: Alumite coating
⑤ Motor cover	Die-cast aluminum (ADC12)	Surface treatment: Alumite coating + Paint
⑥ Front cover	Die-cast aluminum (ADC12)	Surface treatment: Alumite coating + Paint
⑦ Seal	Urethane rubber (U)	
⑧ Actuator cable	Polyvinyl chloride (PVC)	
⑨ Air purge joint	Polyphenylene sulfide (PPS)	


* Alumite coating has been removed in the machined areas of the table ② and mounting bracket ③. To add alumite coating to these areas, specify the "Additional alumite coating (code: AL)" option.

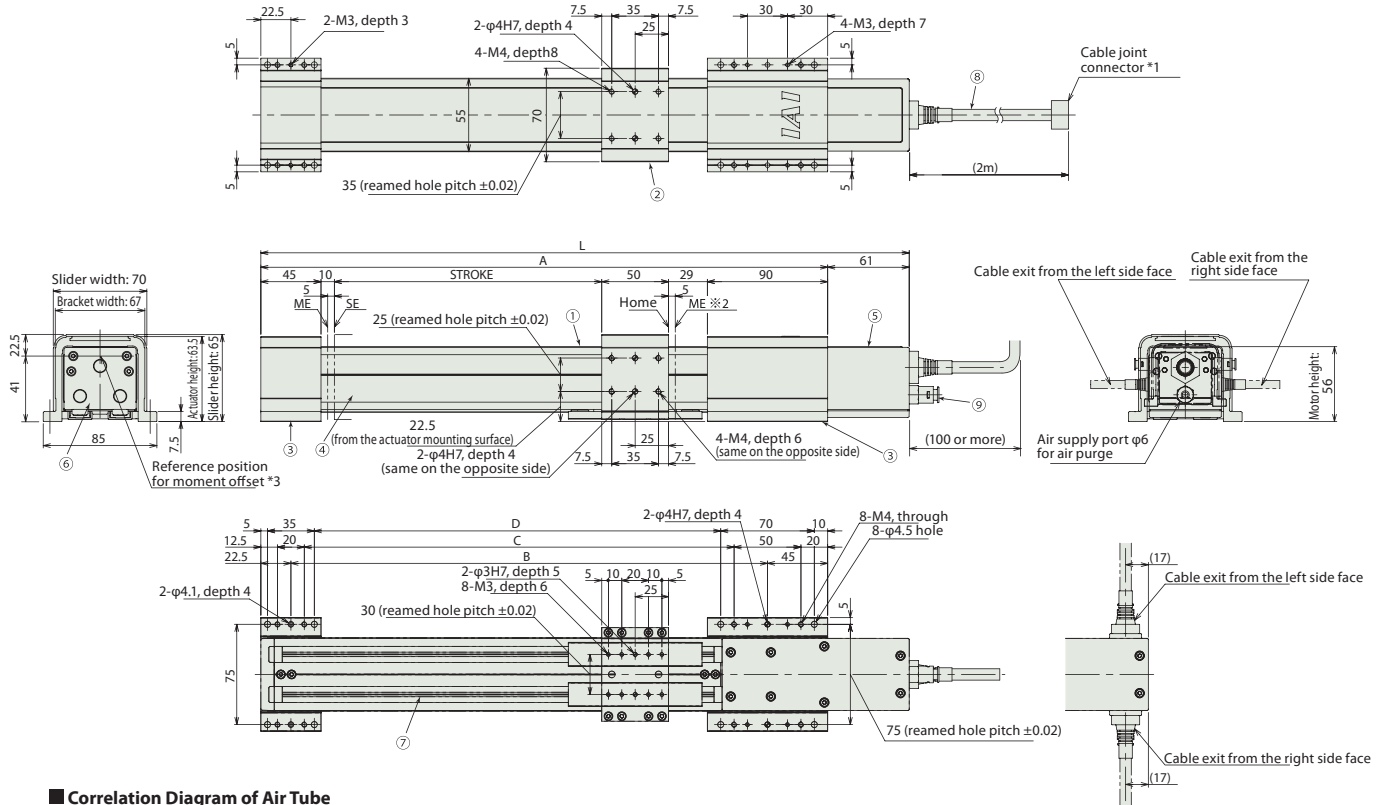

Correlation Diagram of Air Tube Length vs. Air Flow Rate

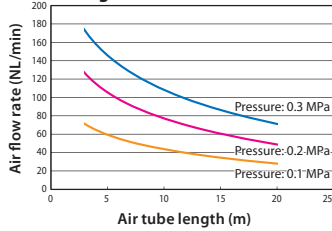

Push Force of RCP4W-SA5

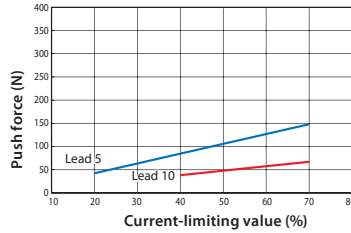

Note on Push-motion Operation

When performing push-motion operation, make sure the reactive moment generated by the push force does not exceed 80% of the dynamic allowable moment (M_a or M_b) specified in the catalog.

In push-motion operation, the travel speed is fixed at 25 mm/s.

- The above correlation diagram assumes an air tube of 6 mm in outer diameter and 4 mm in inner diameter. (A joint of 6 mm in outer diameter is used on the actuator side.)
- Use the correlation diagram as a reference to determine an appropriate pressure and air tube length in such a way that the air flow rate will become 40 NL/min or more (clean dry air).

Dimensions and Mass by Stroke

Stroke	100	150	200	250	300	350	400	450	500
L	385	435	485	535	585	635	685	735	785
A	324	374	424	474	524	574	624	674	724
B	256.5	306.5	356.5	406.5	456.5	506.5	556.5	606.5	656.5
C	221.5	271.5	321.5	371.5	421.5	471.5	521.5	571.5	621.5
D	204	254	304	354	404	454	504	554	604
Mass (kg)	2.8	2.9	3.1	3.2	3.4	3.5	3.7	3.8	4.0

Applicable Controller

RCP4W series actuators can be operated with the controllers indicated below. Select the type according to your intended application.

(Note) These actuators cannot be operated with controllers other than the PCON-CA.

Title	External view	Model number	Features	Maximum number of positioning points	Input power	Power supply capacity	Reference page
Positioner type (NPN specification)		PCON-CA-3SPI-NP-□-0-□	Register positions to move the actuator into the controller beforehand, and specify the number corresponding to each desired position to operate the actuator.	512 points	DC24V	Rated: 3.5 A Maximum: 4.2 A	P13
Positioner type (PNP specification)		PCON-CA-3SPI-PN-□-0-□					
Pulse-train type (NPN specification)		PCON-CA-3SPI-PLN-□-0-□	The actuator can be operated freely via pulse-train controller from an external output device.				
Pulse-train type (PNP specification)		PCON-CA-3SPI-PLP-□-0-□					

RCP4W-SA6C

RoboCylinder
Pulse motor

Splash-proof slider type
Coupling specification

Actuator width: 62 mm

Model Specification Items

RCP4W — **SA6C** — **I** — **42P** — — — **P3** — —

Series — Type — Encoder type — Motor type — Lead — Stroke — Applicable controller — Cable length — Options

I: Incremental specification
* Also select code "I" for the simple absolute specification.

42P: Pulse motor size 42


12: 12mm
6: 6mm

100: 100mm
600: 600mm
(Can be set in 50-mm increments.)

P3: PCON-CA
* The RCP4W can be operated only with the PCON-CA

N: None
P: 1 m
S: 3 m
M: 5 m
X : Length designation
R : Robot cable



Refer to the option list below.

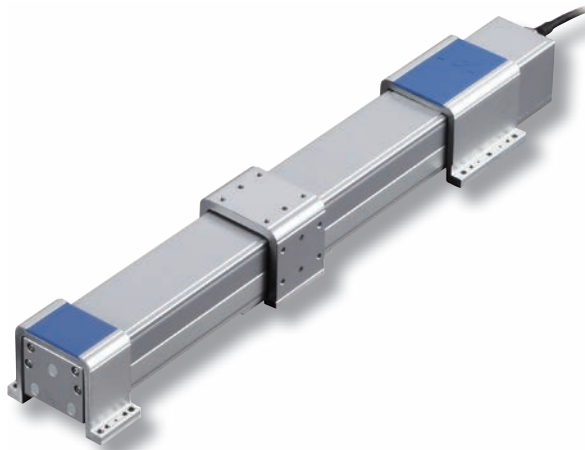

- (1) This actuator is designed exclusively for horizontal installation. It cannot be installed vertically. When hanging the actuator from the ceiling or mounting it on the wall, be sure to do so using an optional dedicated bracket.
- (2) The payload varies depending on the acceleration/deceleration. The upper limit of acceleration/deceleration is 0.6 G.
- (3) The cable joint connector is not splash-proof, so install the connector in a location where it will not come in contact with water.
- (4) Refer to the page at right for the air tube length and air flow rate when implementing air purge.

■ Payload by Acceleration/Deceleration

With the RCP4W series, the payload remains the same even when the speed is raised. However, the payload will drop if the acceleration is raised. Check on the table below.

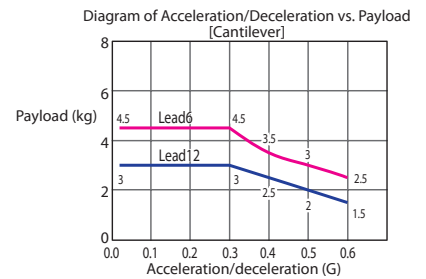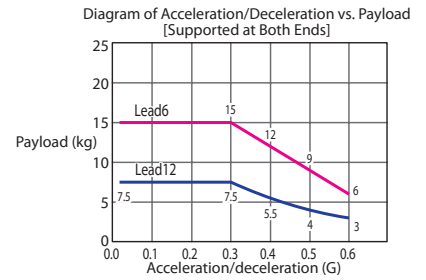

Actuator Specifications

■ Leads and Payloads

Model number	Lead (mm)	Maximum horizontal payload (kg)		Maximum push force (N)	Positioning repeatability (mm)	Stroke (mm)
		Supported on both ends	Cantilever			
RCP4W-SA6C-I-42P-12- <input type="checkbox"/> - <input type="checkbox"/> - <input type="checkbox"/>	12	7.5	3	82.8	±0.02	100 to 600 (in 50-mm increments)
RCP4W-SA6C-I-42P-6- <input type="checkbox"/> - <input type="checkbox"/> - <input type="checkbox"/>	6	15	4.5	179.5		

Legend Stroke Cable length Options

■ Stroke and Maximum Speed

Lead	Stroke	100 to 600 (in 50-mm increments)
		12
6		200

(unit: mm/s)

Cable length

Type	Cable symbol
Standard type	P(1m)
	S(3m)
	M(5m)
Special length	X06(6m) ~ X10(10m)
	X11(11m) ~ X15(15m)
	X16(16m) ~ X20(20m)
Robot cable	R01(1m) ~ R03(3m)
	R04(4m) ~ R05(5m)
	R06(6m) ~ R10(10m)
	R11(11m) ~ R15(15m)
	R16(16m) ~ R20(20m)


Options

Name	Option code	See page
Cable exit from the left side face	A1	→P4
Cable exit from the right side face	A3	→P4
Additional alumite coating	AL	→P4
Food grade grease (edible grease)	GE	→P4
Non-motor side specification	NM	→P4
Ceiling mount (bracket mounted on the left)	HFL	→P4
Ceiling mount (bracket mounted on the right)	HFR	→P4
Wall mount sideways on the left	TFL	→P4
Wall mount sideways on the right	TFR	→P4

Actuator Specifications

Item	Description
Drive system	Ball screw φ10 mm, rolled C10
Positioning repeatability	±0.02mm
Lost motion	0.1 mm or less
Static allowable moment	Supported on both ends
	Cantilever
Dynamic allowable moment (*)	Supported on both ends
	Cantilever
Overhang load length	Supported on both ends
	Cantilever
Protective structure	IP65 (with air purge)
Ambient operating temperature, humidity	0 to 40°C, 85% RH or less (Non-condensing)

(*) Based on 5000 km of traveling life

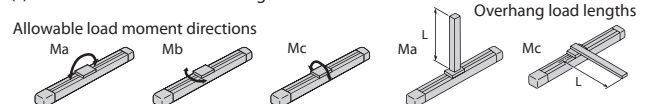

Dimensional Drawings

CAD drawings can be downloaded from the website.

www.robocylinder.de




* See P11 for the dimensional drawing for the ceiling mount specification. See P12 for the dimensional drawing for the wall mount specification.

- *1 Connect the motor and encoder cables.
- *2 During home return, be careful to avoid interference from peripheral objects because the slider travels until the mechanical end.
- *3 Reference position for calculating moments.


Materials of Main Components

① Base	Extruded aluminum (A6063)	Surface treatment: Aluminite coating
② Table	Extruded aluminum (A6063)	Surface treatment: Aluminite coating (excluding machined areas)
③ Mounting bracket (front/rear)	Extruded aluminum (A6063)	Surface treatment: Aluminite coating (excluding machined areas)
④ Side cover	Extruded aluminum (A6063)	Surface treatment: Aluminite coating
⑤ Motor cover	Die-cast aluminum (ADC12)	Surface treatment: Aluminite coating + Paint
⑥ Front cover	Die-cast aluminum (ADC12)	Surface treatment: Aluminite coating + Paint
⑦ Seal	Urethane rubber (U)	
⑧ Actuator cable	Polyvinyl chloride (PVC)	
⑨ Air purge joint	Polyphenylene sulfide (PPS)	


* Aluminite coating has been removed in the machined areas of the table ② and mounting bracket ③. To add aluminite coating to these areas, specify the "Additional aluminite coating (code: AL)" option.

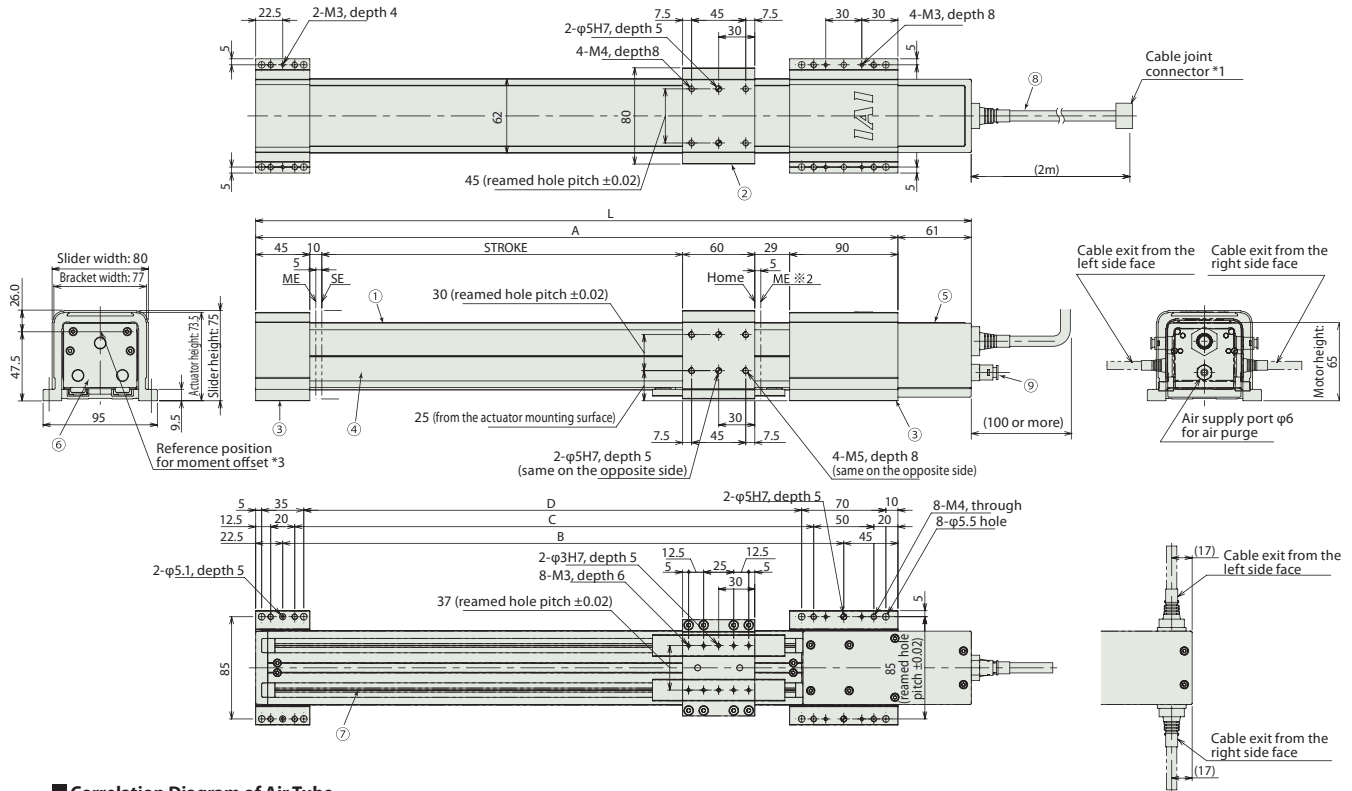

Correlation Diagram of Air Tube Length vs. Air Flow Rate

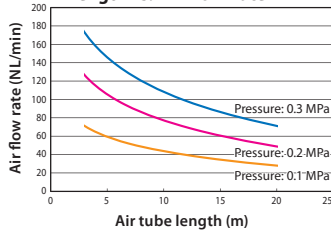

Push Force of RCP4W-SA6

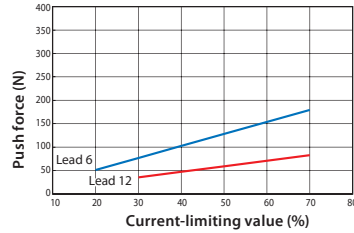

Note on Push-motion Operation

When performing push-motion operation, make sure the reactive moment generated by the push force does not exceed 80% of the dynamic allowable moment (M_a or M_b) specified in the catalog.

In push-motion operation, the travel speed is fixed at 20 mm/s.

- The above correlation diagram assumes an air tube of 6 mm in outer diameter and 4 mm in inner diameter. (A joint of 6 mm in outer diameter is used on the actuator side.)
- Use the correlation diagram as a reference to determine an appropriate pressure and air tube length in such a way that the air flow rate will become 40 NL/min or more (clean dry air).

Dimensions and Mass by Stroke

Stroke	100	150	200	250	300	350	400	450	500	550	600
L	395	445	495	545	595	645	695	745	795	845	895
A	334	384	434	484	534	584	634	684	734	784	834
B	266.5	316.5	366.5	416.5	466.5	516.5	566.5	616.5	666.5	716.5	766.5
C	231.5	281.5	331.5	381.5	431.5	481.5	531.5	581.5	631.5	681.5	731.5
D	214	264	314	364	414	464	514	564	614	664	714
Mass (kg)	3.9	4.1	4.3	4.5	4.7	4.9	5.1	5.3	5.5	5.8	6.0

Applicable Controller

RCP4W series actuators can be operated with the controllers indicated below. Select the type according to your intended application.

(Note) These actuators cannot be operated with controllers other than the PCON-CA.

Title	External view	Model number	Features	Maximum number of positioning points	Input power	Power supply capacity	Reference page
Positioner type (NPN specification)		PCON-CA-42PI-NP-□-0-□	Register positions to move the actuator into the controller beforehand, and specify the number corresponding to each desired position to operate the actuator.	512 points	DC24V	Rated: 3.5 A Maximum: 4.2 A	P13
Positioner type (PNP specification)		PCON-CA-42PI-PN-□-0-□					
Pulse-train type (NPN specification)		PCON-CA-42PI-PLN-□-0-□	The actuator can be operated freely via pulse-train controller from an external output device.				
Pulse-train type (PNP specification)		PCON-CA-42PI-PLP-□-0-□					

RCP4W-SA7C

RoboCylinder
Pulse motor

Splash-proof slider type
Coupling specification

Actuator width: 77 mm

Model Specification Items

RCP4W — **SA7C** — **I** — **56P** — — — **P3** — —

I: Incremental specification
* Also select code "I" for the simple absolute specification.

56P: Pulse motor size 56

16: 16mm

8: 8mm

100: 100mm
700: 700mm
(Can be set in 50-mm increments.)

* The RCP4W can be operated only with the PCON-CA

P3: PCON-CA

N: None

P: 1 m


S: 3 m

M: 5 m

X : Length designation

R : Robot cable



Refer to the option list below.

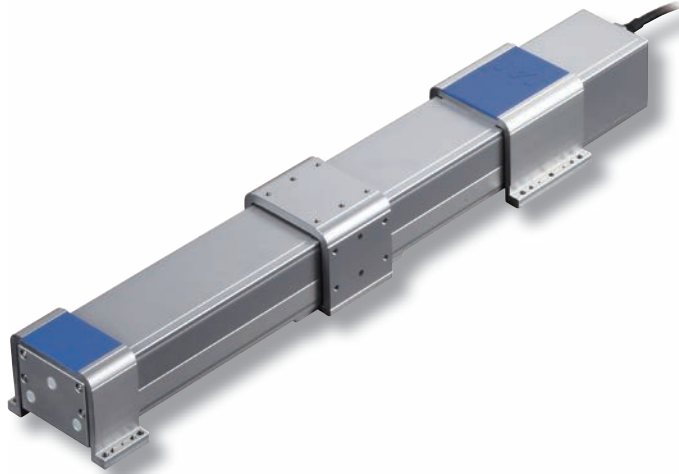

- (1) This actuator is designed exclusively for horizontal installation. It cannot be installed vertically. When hanging the actuator from the ceiling or mounting it on the wall, be sure to do so using an optional dedicated bracket.
- (2) The payload varies depending on the acceleration/deceleration. The upper limit of acceleration/deceleration is 0.6 G.
- (3) The cable joint connector is not splash-proof, so install the connector in a location where it will not come in contact with water.
- (4) Refer to the page at right for the air tube length and air flow rate when implementing air purge.

■ Payload by Acceleration/Deceleration

With the RCP4W series, the payload remains the same even when the speed is raised. However, the payload will drop if the acceleration is raised. Check on the table below.

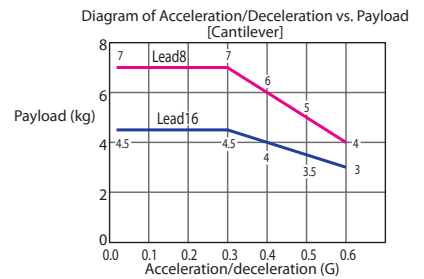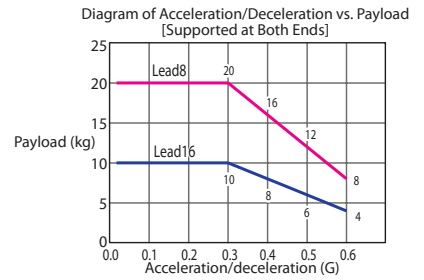

Actuator Specifications

■ Leads and Payloads

Model number	Lead (mm)	Maximum horizontal payload (kg)		Maximum push force (N)	Positioning repeatability (mm)	Stroke (mm)
		Supported on both ends	Cantilever			
RCP4W-SA7C-I-56P-16- <input type="checkbox"/> -P3- <input type="checkbox"/> - <input type="checkbox"/>	16	10	4.5	161.9	±0.02	100 to 700 (in 50-mm increments)
RCP4W-SA7C-I-56P-8- <input type="checkbox"/> -P3- <input type="checkbox"/> - <input type="checkbox"/>	8	20	7	337.9		

Legend Stroke Cable length Options

■ Stroke and Maximum Speed

Lead	Stroke	100 to 700 (in 50-mm increments)	
		100 to 700 (in 50-mm increments)	Maximum speed (unit: mm/s)
16		530	
8		265	

(unit: mm/s)

Cable length

Type	Cable symbol	
Standard type	P(1m)	
	S(3m)	
	M(5m)	
Special length	X06(6m) ~ X10(10m)	
	X11(11m) ~ X15(15m)	
	X16(16m) ~ X20(20m)	
Robot cable	R01(1m) ~ R03(3m)	
	R04(4m) ~ R05(5m)	
	R06(6m) ~ R10(10m)	
	R11(11m) ~ R15(15m)	
	R16(16m) ~ R20(20m)	


Options

Name	Option code	See page
Cable exit from the left side face	A1	→P4
Cable exit from the right side face	A3	→P4
Additional alumite coating	AL	→P4
Food grade grease (edible grease)	GE	→P4
Non-motor side specification	NM	→P4
Ceiling mount (bracket mounted on the left)	HFL	→P4
Ceiling mount (bracket mounted on the right)	HFR	→P4
Wall mount sideways on the left	TFL	→P4
Wall mount sideways on the right	TFR	→P4

Actuator Specifications

Item	Description
Drive system	Ball screw φ12 mm, rolled C10
Positioning repeatability	±0.02mm
Lost motion	0.1 mm or less
Static allowable moment	Supported on both ends: Ma: 11.7N·m Mb: 16.6 N·m Mc: 31.8 N·m
	Cantilever: Ma: 5.8 N·m Mb: 8.3 N·m Mc: 15.9 N·m
Dynamic allowable moment (*)	Supported on both ends: Ma: 6.1 N·m Mb: 8.8 N·m Mc: 16.8 N·m
	Cantilever: Ma: 3.1 N·m Mb: 4.4 N·m Mc: 8.4 N·m
Overhang load length	Supported on both ends: 175 mm or less
	Cantilever: 105 mm or less
Protective structure	IP65 (with air purge)
Ambient operating temperature, humidity	0 to 40°C, 85% RH or less (Non-condensing)

(*) Based on 5000 km of traveling life

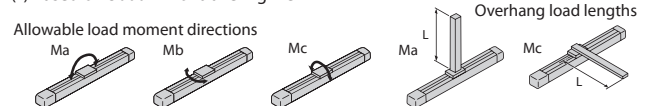

Dimensional Drawings

CAD drawings can be downloaded from the website.

www.robocylinder.de




* See P11 for the dimensional drawing for the ceiling mount specification. See P12 for the dimensional drawing for the wall mount specification.

- *1 Connect the motor and encoder cables.
- *2 During home return, be careful to avoid interference from peripheral objects because the slider travels until the mechanical end.
- *3 Reference position for calculating moments.


Materials of Main Components

① Base	Extruded aluminum (A6063)	Surface treatment: Alumite coating
② Table	Extruded aluminum (A6063)	Surface treatment: Alumite coating (excluding machined areas)
③ Mounting bracket (front/rear)	Extruded aluminum (A6063)	Surface treatment: Alumite coating (excluding machined areas)
④ Side cover	Extruded aluminum (A6063)	Surface treatment: Alumite coating
⑤ Motor cover	Die-cast aluminum (ADC12)	Surface treatment: Alumite coating + Paint
⑥ Front cover	Die-cast aluminum (ADC12)	Surface treatment: Alumite coating + Paint
⑦ Seal	Urethane rubber (U)	
⑧ Actuator cable	Polyvinyl chloride (PVC)	
⑨ Air purge joint	Polyphenylene sulfide (PPS)	

* Alumite coating has been removed in the machined areas of the table ② and mounting bracket ③. To add alumite coating to these areas, specify the "Additional alumite coating (code: AL)" option.

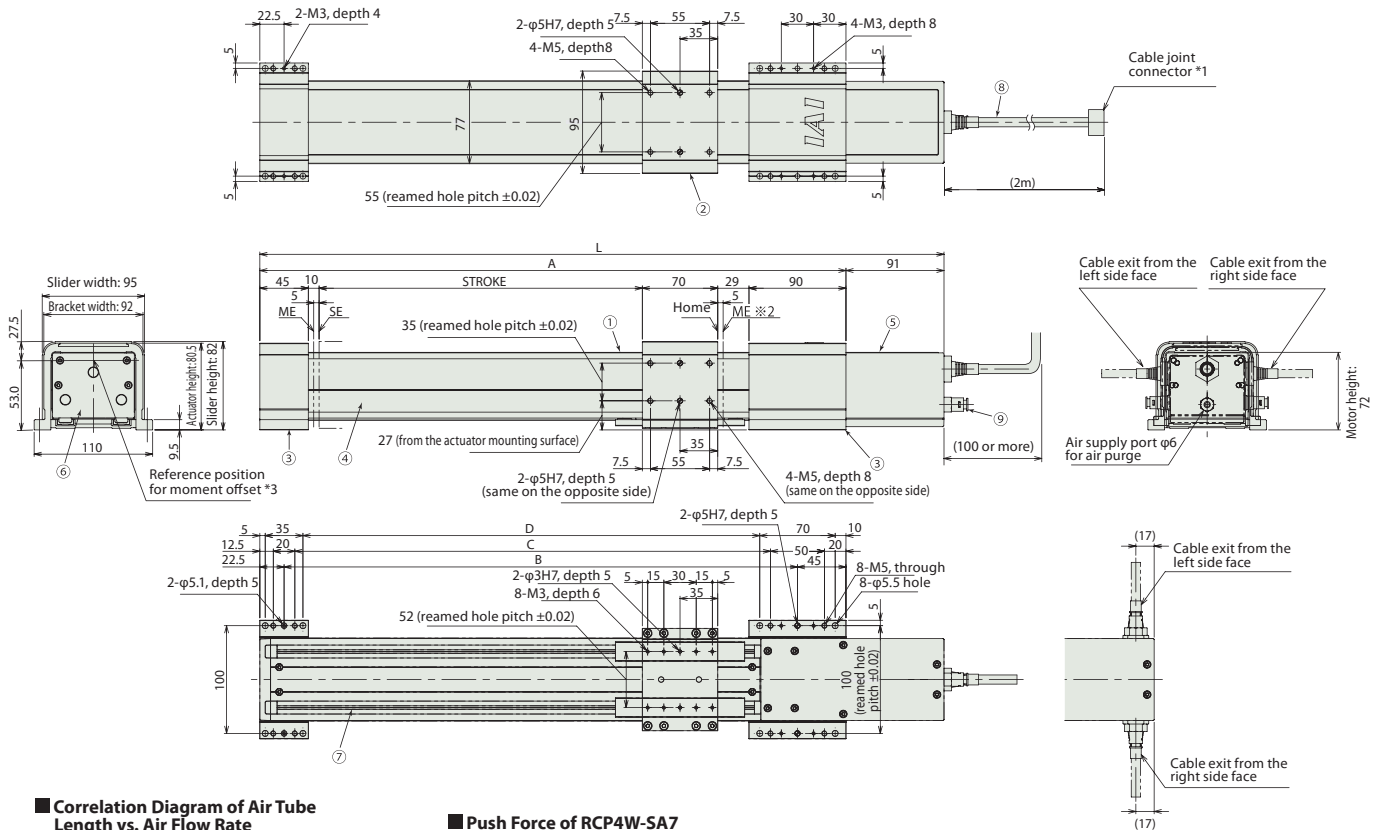


Correlation Diagram of Air Tube Length vs. Air Flow Rate

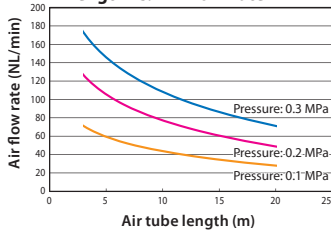

- The above correlation diagram assumes an air tube of 6 mm in outer diameter and 4 mm in inner diameter. (A joint of 6 mm in outer diameter is used on the actuator side.)
- Use the correlation diagram as a reference to determine an appropriate pressure and air tube length in such a way that the air flow rate will become 40 NL/min or more (clean dry air).

Push Force of RCP4W-SA7

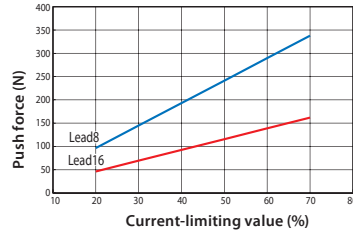

Note on Push-motion Operation

When performing push-motion operation, make sure the reactive moment generated by the push force does not exceed 80% of the dynamic allowable moment (M_a or M_b) specified in the catalog.

In push-motion operation, the travel speed is fixed at 20 mm/s.

Dimensions and Mass by Stroke

Stroke	100	150	200	250	300	350	400	450	500	550	600	650	700
L	435	485	535	585	635	685	735	785	835	885	935	985	1035
A	344	394	444	494	544	594	644	694	744	794	844	894	944
B	276.5	326.5	376.5	426.5	476.5	526.5	576.5	626.5	676.5	726.5	776.5	826.5	876.5
C	241.5	291.5	341.5	391.5	441.5	491.5	541.5	591.5	641.5	691.5	741.5	791.5	841.5
D	224	274	324	374	424	474	524	574	624	674	724	774	824
Mass (kg)	5.9	6.2	6.5	6.8	7.1	7.4	7.6	7.9	8.2	8.5	8.8	9.0	9.3

Applicable Controller

RCP4W series actuators can be operated with the controllers indicated below. Select the type according to your intended application.


(Note) These actuators cannot be operated with controllers other than the PCON-CA.

Title	External view	Model number	Features	Maximum number of positioning points	Input power	Power supply capacity	Reference page
Positioner type (NPN specification)		PCON-CA-56PI-NP-□-0-□	Register positions to move the actuator into the controller beforehand, and specify the number corresponding to each desired position to operate the actuator.	512 points	DC24V	Rated: 3.5 A Maximum: 4.2 A	P13
Positioner type (PNP specification)		PCON-CA-56PI-PN-□-0-□					
Pulse-train type (NPN specification)		PCON-CA-56PI-PLN-□-0-□	The actuator can be operated freely via pulse-train controller from an external output device.	—			
Pulse-train type (PNP specification)		PCON-CA-56PI-PLP-□-0-□					

Dimensions of the Ceiling Mount Specification

The dimensions shown assume that the ceiling mount option (code: HFL/HFR) is selected.

RCP4W-SA5C

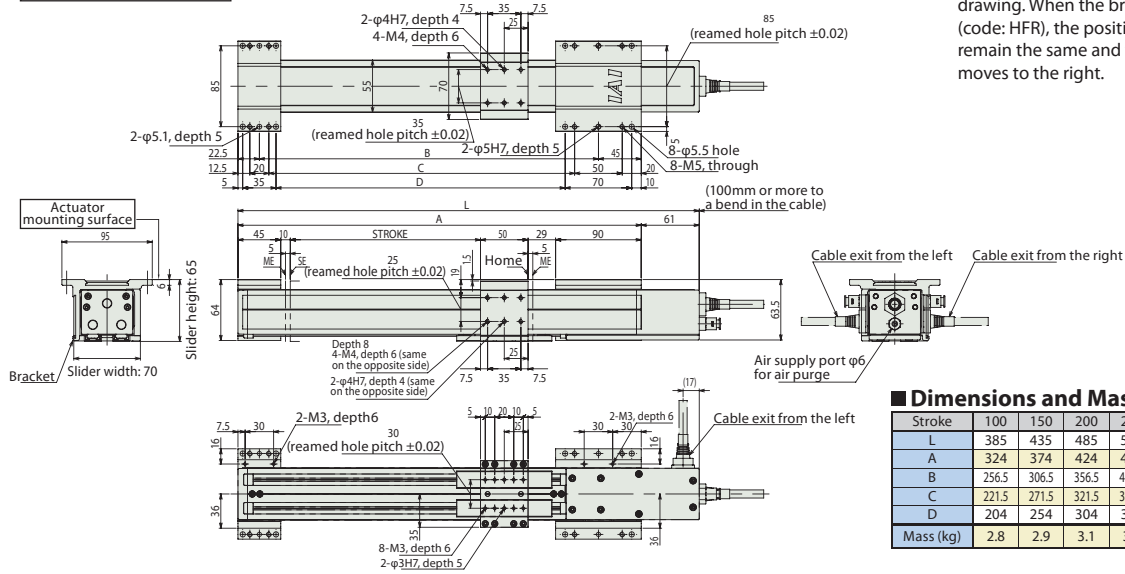


* The bracket is mounted on the left (code: HFL) in this drawing. When the bracket is mounted on the right (code: HFR), the positions of the mounting holes remain the same and the bracket on the side simply moves to the right.

■ Dimensions and Mass by Stroke

Stroke	100	150	200	250	300	350	400	450	500
L	385	435	485	535	585	635	685	735	785
A	324	374	424	474	524	574	624	674	724
B	256.5	306.5	356.5	406.5	456.5	506.5	556.5	606.5	656.5
C	221.5	271.5	321.5	371.5	421.5	471.5	521.5	571.5	621.5
D	204	254	304	354	404	454	504	554	604
Mass (kg)	2.8	2.9	3.1	3.2	3.4	3.5	3.7	3.8	4.0

RCP4W-SA6C

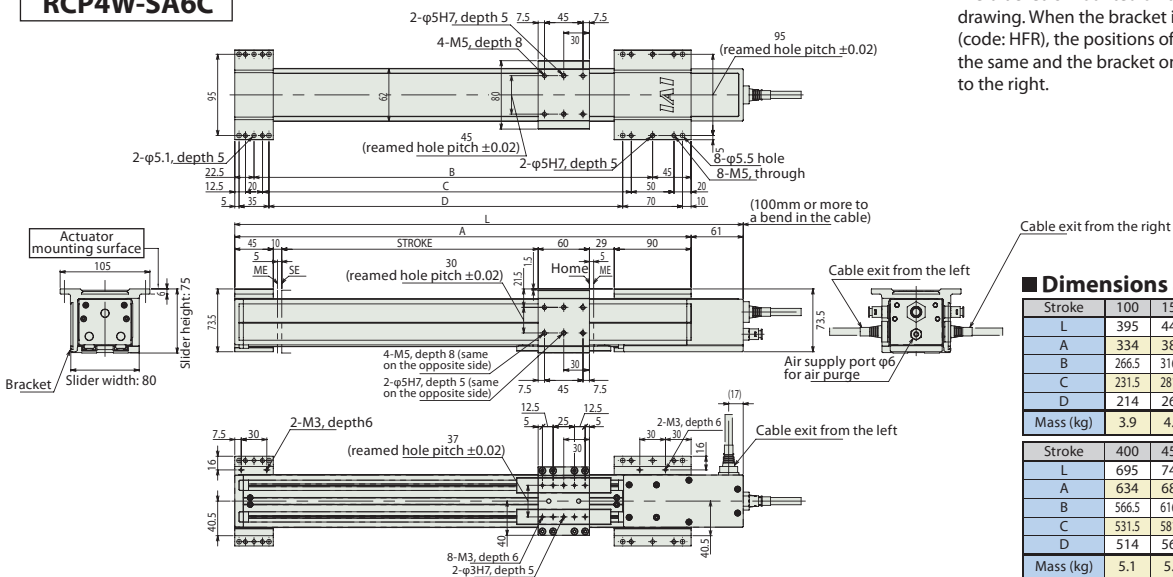


* The bracket is mounted on the left (code: HFL) in this drawing. When the bracket is mounted on the right (code: HFR), the positions of mounting holes remain the same and the bracket on the side simply moves to the right.

■ Dimensions and Mass by Stroke

Stroke	100	150	200	250	300	350
L	395	445	495	545	595	645
A	334	384	434	484	534	584
B	266.5	316.5	366.5	416.5	466.5	516.5
C	231.5	281.5	331.5	381.5	431.5	481.5
D	214	264	314	364	414	464
Mass (kg)	3.9	4.1	4.3	4.5	4.7	4.9

Stroke	400	450	500	550	600
L	695	745	795	845	895
A	634	684	734	784	834
B	566.5	616.5	666.5	716.5	766.5
C	531.5	581.5	631.5	681.5	731.5
D	514	564	614	664	714
Mass (kg)	5.1	5.3	5.5	5.8	6.0

RCP4W-SA7C

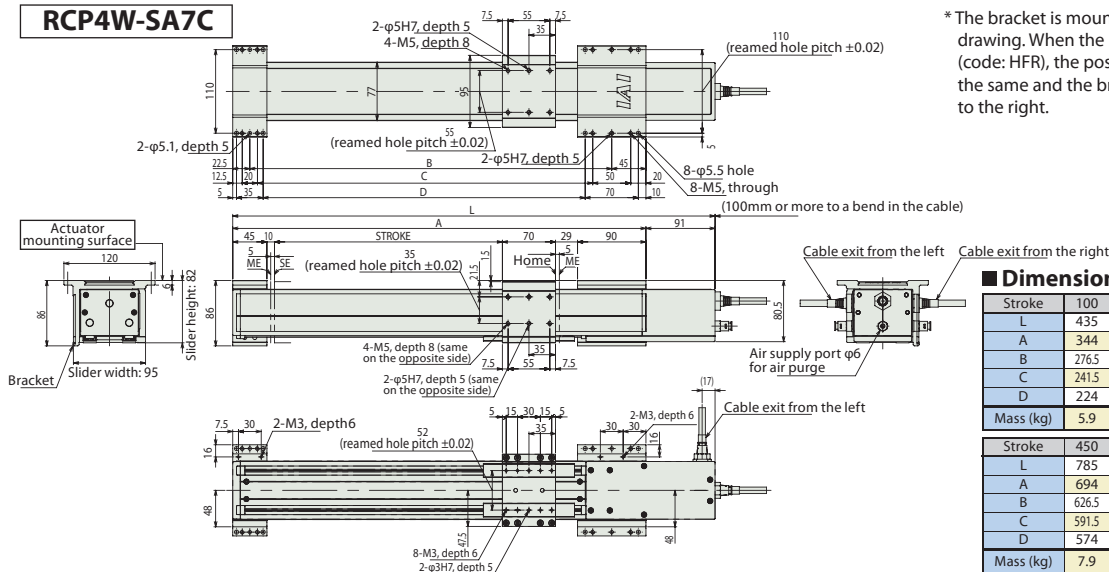

* The bracket is mounted on the left (code: HFL) in this drawing. When the bracket is mounted on the right (code: HFR), the positions of mounting holes remain the same and the bracket on the side simply moves to the right.

■ Dimensions and Mass by Stroke

Stroke	100	150	200	250	300	350	400
L	435	485	535	585	635	685	735
A	344	394	444	494	544	594	644
B	276.5	326.5	376.5	426.5	476.5	526.5	576.5
C	241.5	291.5	341.5	391.5	441.5	491.5	541.5
D	224	274	324	374	424	474	524
Mass (kg)	5.9	6.2	6.5	6.8	7.1	7.4	7.6


Stroke	450	500	550	600	650	700
L	785	835	885	935	985	1035
A	694	744	794	844	894	944
B	626.5	676.5	726.5	776.5	826.5	876.5
C	591.5	641.5	691.5	741.5	791.5	841.5
D	574	624	674	724	774	824
Mass (kg)	7.9	8.2	8.5	8.8	9.0	9.3

Dimensions of the Wall Mount Specification

The dimensions shown assume that the wall mount option (code: TFR/TFL) is selected.

RCP4W-SA5C

* The actuator is mounted sideways on the right (code: TFR) in this drawing. When the actuator is mounted sideways on the left (code: TFL), the actuator mounting surface comes to the left side.

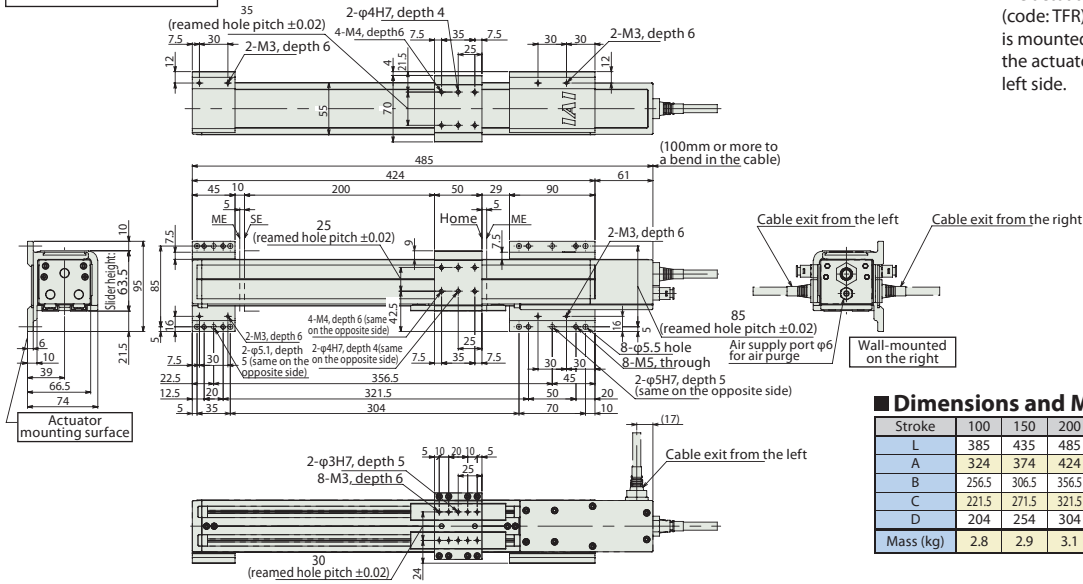


Dimensions and Mass by Stroke

Stroke	100	150	200	250	300	350	400	450	500
L	385	435	485	535	585	635	685	735	785
A	324	374	424	474	524	574	624	674	724
B	256.5	306.5	356.5	406.5	456.5	506.5	556.5	606.5	656.5
C	221.5	271.5	321.5	371.5	421.5	471.5	521.5	571.5	621.5
D	204	254	304	354	404	454	504	554	604
Mass (kg)	2.8	2.9	3.1	3.2	3.4	3.5	3.7	3.8	4.0

RCP4W-SA6C

* The actuator is mounted sideways on the right (code: TFR) in this drawing. When the actuator is mounted sideways on the left (code: TFL), the actuator mounting surface comes to the left side.

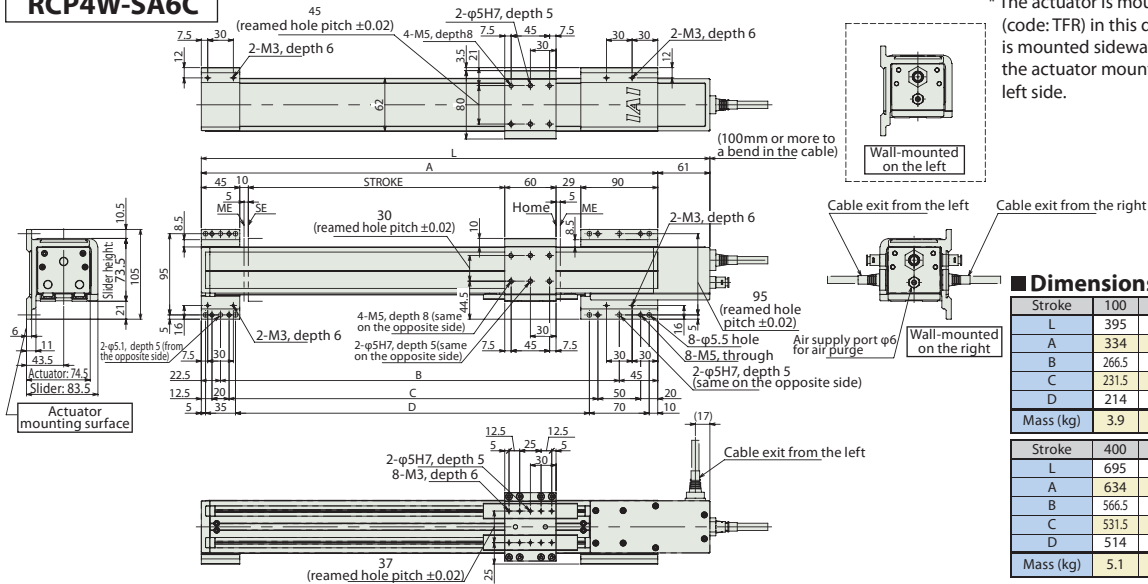


Dimensions and Mass by Stroke

Stroke	100	150	200	250	300	350
L	395	445	495	545	595	645
A	334	384	434	484	534	584
B	266.5	316.5	366.5	416.5	466.5	516.5
C	231.5	281.5	331.5	381.5	431.5	481.5
D	214	264	314	364	414	464
Mass (kg)	3.9	4.1	4.3	4.5	4.7	4.9

Stroke	400	450	500	550	600
L	695	745	795	845	895
A	634	684	734	784	834
B	566.5	616.5	666.5	716.5	766.5
C	531.5	581.5	631.5	681.5	731.5
D	514	564	614	664	714
Mass (kg)	5.1	5.3	5.5	5.8	6.0

RCP4W-SA7C

* The actuator is mounted sideways on the right (code: TFR) in this drawing. When the actuator is mounted sideways on the left (code: TFL), the actuator mounting surface comes to the left side.

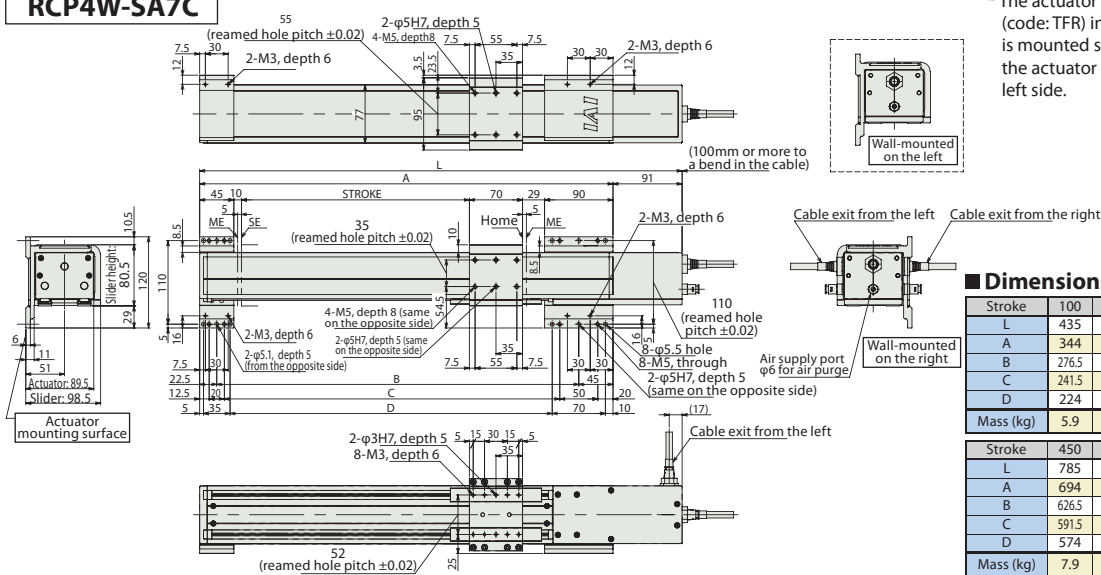

Dimensions and Mass by Stroke

Stroke	100	150	200	250	300	350	400
L	435	485	535	585	635	685	735
A	344	394	444	494	544	594	644
B	276.5	326.5	376.5	426.5	476.5	526.5	576.5
C	241.5	291.5	341.5	391.5	441.5	491.5	541.5
D	224	274	324	374	424	474	524
Mass (kg)	5.9	6.2	6.5	6.8	7.1	7.4	7.6

Stroke	450	500	550	600	650	700
L	785	835	885	935	985	1035
A	694	744	794	844	894	944
B	626.5	676.5	726.5	776.5	826.5	876.5
C	591.5	641.5	691.5	741.5	791.5	841.5
D	574	624	674	724	774	824
Mass (kg)	7.9	8.2	8.5	8.8	9.0	9.3

PCON-CA




**Positioner / Field network / Pulse-train Type
Controller with High-output Driver for RCP4W
<PowerCon 150>**

Refer to the RCP4 catalog for details on this controller. * The RCP4W can be operated only with the PCON-CA.


List of Models

Series name	PCON		
Type name	CA		
Description	Controller with high-output driver for RCP4		
External view			
Control method	Positioner type	Field network type	Pulse-train type
Positioning method	Incremental specification / Simple absolute specification		Incremental specification
Position points	512 points	768 points	—

Model Number

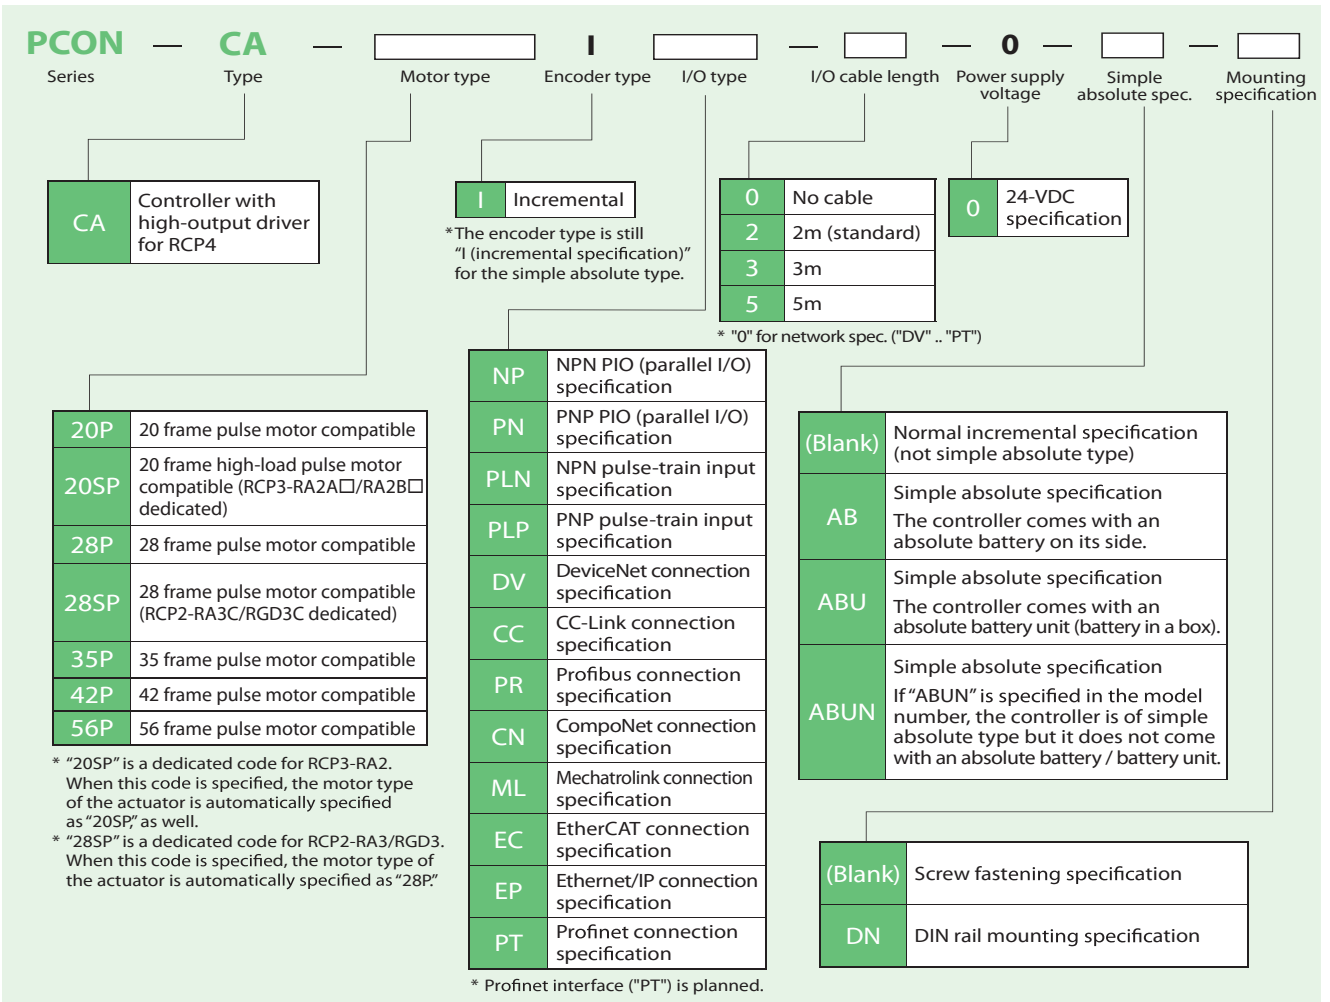

External Dimensions

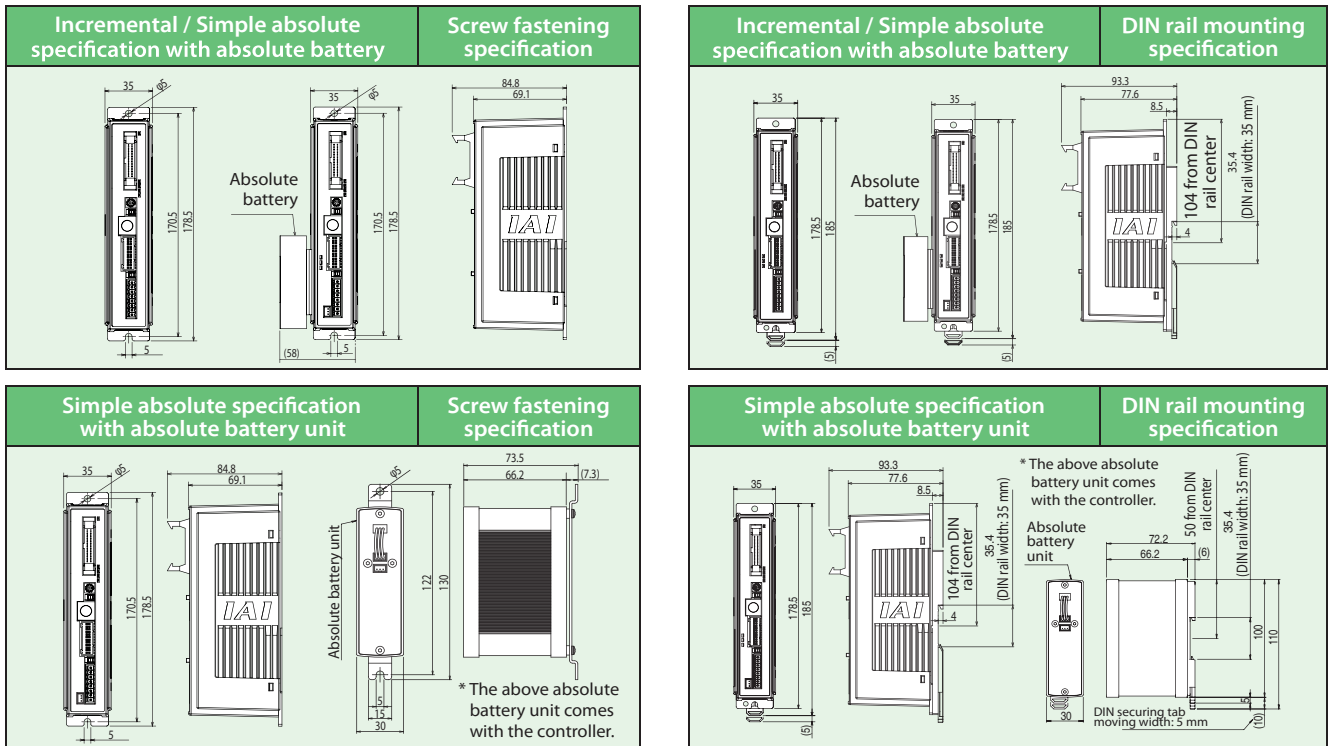

Specification Table

Item			Description
Number of controlled axes			1 axis
Power supply voltage			24VDC \pm 10%
Load capacity	RCP4W	Motor type	35P, 42P, 56P
Heat output			Rated 3.5 A / 4.2 A max. (High-output setting disabled: 2 A max.)
Rush current (Note 1)			8W
Actuator cable length			8.3A
External interface			20m max.
Data setting/input method			Dedicated 24-V-DC signal input/output (NPN or PNP selected) - Up to 16 input & output points / Cable length: 10m max.
Data retention memory			DeviceNet, CC-Link, Profinet, CompoNet, Mechatrolink, EtherCAT, Ethernet/IP, Profinet
Number of positions in positioner mode			PC software, touch-panel teaching pendant, teaching pendant
Pulse-train interface			Position data and parameters are saved in the non-volatile memory (rewrite life: unlimited)
Input pulse			Standard 64 points, maximum 512/768 points (PIO/network specification) Note) Positioning points vary depending on the selected PIO pattern.
Command pulse magnification (electronic gear ratio: A/B)			Differential method (line driver method): 200 kpps max. / Cable length: 10 m max.
Feedback pulse output			Open collector method: Not supported (Note 2)
LED display (installed on the front panel)			1/50 < A/B < 50/1 Setting range of A and B (set by parameters): 1 to 4096
Isolation resistance			None
SV (green)/ALM (red): Servo ON/alarm generation			500 VDC, 10 M Ω or more
STS0 to 3: Status indication			
RDY (green)/ALM (red): Absolute function normal/absolute function abnormal (simple absolute specification)			
1,0 (green) (red): Absolute function status indication (simple absolute specification)			
Environment	Ambient operating temperature		0 to 40°C
	Ambient operating humidity		85%RH or less (non-condensing)
	Operating ambience		Not exposed to corrosive gases
	Weight		285 g or less, or 485 g (including 190 g for the battery) or less for the simple absolute specification

(Note 1) Rush current will flow for approx. 1 to 2 msec after the power is turned on (at 40°C). The rush current value varies depending on the impedance of the power supply line.
(Note 2) If the host implements open collector output, use the separately sold AK-04 (optional) to convert the signals to differential output signals.

**RCP4W Series
Slider Type
Catalogue No. 1012-E**

The information contained in this catalog
is subject to change without notice for the
purpose of product improvement



IAI Industrieroboter GmbH
Ober der Röth 4
D-65824 Schwalbach / Frankfurt
Germany
Phone: +49-6196-895-0
Fax: +49-6196-8895-24
E-Mail: info@IAI-GmbH.de
Internet: <http://www.eu.IAI-GmbH.de>

IAI America, Inc.
2690 W. 237th Street
Torrance, CA 90505, U.S.A.
Phone: +1-310-891-6015
Fax: +1-310-891-0815

IAI (Shanghai) Co., Ltd.
Shanghai Jiahua B. C. A8404.808
Hongqiao Rd., Shanghai 200030, China
Phone: +86-21-6448-4753
Fax: +86-21-6448-3992

IAI CORPORATION
645-1 Shimizu Hirose
Shizuoka 424-0102, Japan
Phone: +81-543-64-5105
Fax: +81-543-64-5182